


INTERIOR SYSTEM DOOR WITH LOCK FITTINGS

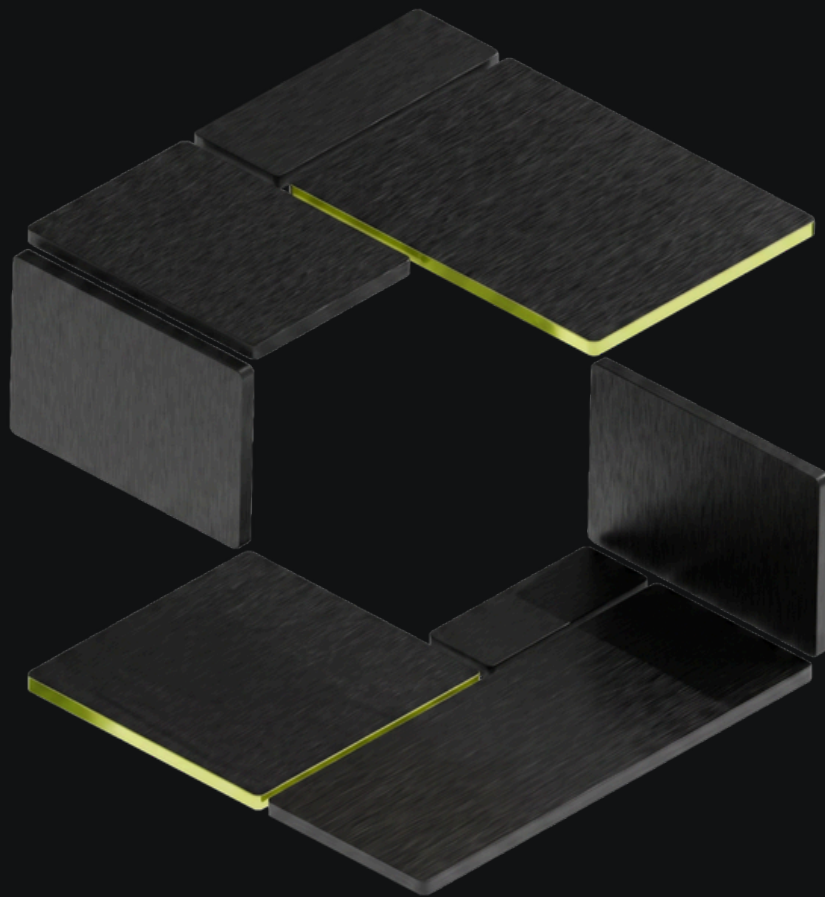

1 Product description

Door made of thin steel sheet with a polyester and polyurethane coating. The coating increases the material's resistance to corrosion and abrasion, making the door ideal for use in interior design systems.

Manufacturer	S4S Nordic
Dimensions	Width 740 / 990 / 1190 mm Height 2100 / 2300 mm
Dimensions opening	Width 750 / 1000 / 1200 mm Height 2113 mm
Colour	Full colour or bi-colour Standard RAL colours
Finishing	Satin (20% gloss): smooth finish, easy to clean, used for doors.
Material	0.6 mm steel sheet · SSAB GreenCoat® Pural BT
Lock fittings	adjusted for standard latches/elocks



STANDARD COLOUR RANGE

 AZTEC YELLOW RAL 1018	 TANGERINE ORANGE RAL 2000	 PURE ORANGE RAL 2004	 POPPY RED RAL 3020	 PATRIOT RED RAL 3000	 LINDEN GREEN RAL 6018	 OCEAN BLUE RAL 5021	 SOLENT BLUE RAL 5015
 ULTRAMARINE BLUE RAL 5002	 TELEMAGENTA RAL 4010	 WHITE RAL 9016	 ALUZINC RAL 9006	 AGATE GREY RAL 7038	 STONE GREY RAL 7030	 MOUNTAIN GREY RAL 7016	 NORDIC NIGHT BLACK RAL 9005

RAL Colours Code shown in this document are indicative.

2 Technical information

STEEL THICKNESS

0.6 mm

steel sheet

REACTION TO FIRE

TBC

EN 13501-1

SCRATCH RESISTANCE

40 N




EN 13523-12

CORROSION RESISTANCE

RC5+

EN 10169

Examples

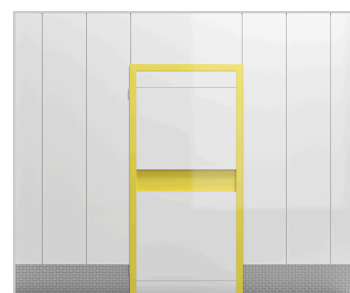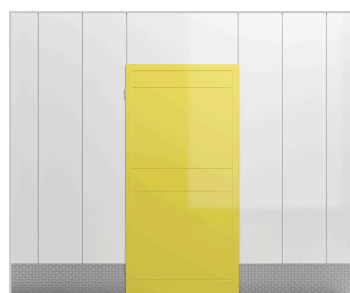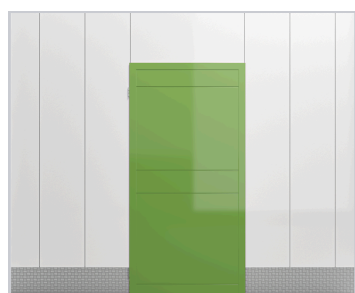

3 OPERATION & MAINTENANCE

ROUTINE CLEANING

- Mild soap solution or a diluted all-purpose or glass cleaner with a soft, lint-free cloth.
- Remove loose dirt and dust first with a soft brush or dry cloth.
- Rub the product gently into the surface, leave max. 5 minutes.
- Clean the whole panel, not only the mark, to avoid local gloss differences.
- Rinse with lukewarm water and dry with a soft cloth to avoid streaks.

STUBBORN STAINS

- Remove greasy marks and dirt within 48 hours — coffee and wine stains set quickly.
- For nail polish, marker, paint or ballpoint stains: acetone mixed with water, max. 2 minutes.
- Rinse thoroughly with lukewarm water, then dry; repeat the five steps if needed.
- Magic sponge with a mild, non-abrasive cleaner as a last resort — rub gently, never press hard.
- Test any cleaner on an inconspicuous area first.

INSPECTION / CONTROL

- Check for deep scratches that break the protective layer underneath.
- In damp areas, rust can appear where the zinc-coated substrate is damaged.
- Repair such scratches with automotive touch-up paint.
- Replace panels with holes, dents or deflections with an equivalent product.

MICRO-SCRATCH REMOVAL

- Wipe with a clean soft cloth and lukewarm water only — no cleaning agent needed.
- Rub in the direction of the surface structure, not across it; use circular motions on smooth finishes.
- Dry with a soft cloth; repeat if scratches are still visible.
- Avoid paper towels on textured surfaces — fibres catch in the structure.

DO NOT USE

Dish soap · abrasive or aggressive cleaners such as scouring pads, steel wool or sandpaper · products containing hydrogen peroxide · floor cleaners with linseed oil, washing powder, silicone-based furniture and plastic cleaners, bleach, petroleum-based cleaners, turpentine, solvents and thinners, scouring powder, white spirit · strong undiluted acids, alkalis or salts · high-pressure washers · paint removers.